



Glendora, California

Toll-Free: 800.735.5566

Phone: 909.592.6272

Fax: 909.592.7971

Roscommon, Ireland


Phone: 35.39.03.25922

Fax: 35.39.03.25921

Equipment Pads

Transformer Pads

Model: EP4242-4

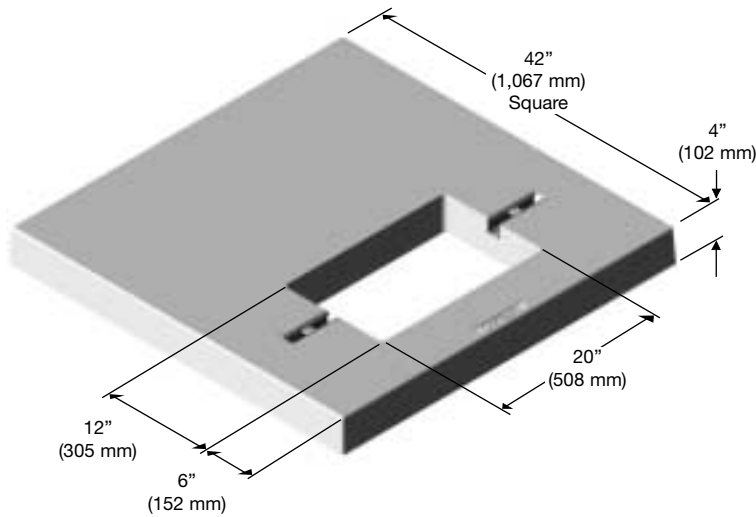


Base

Material: Polymer Concrete

Weight

140 lbs.

Skid Resistant Surface²
(Material compliant with WUC, TRANSFORMER SPEC)

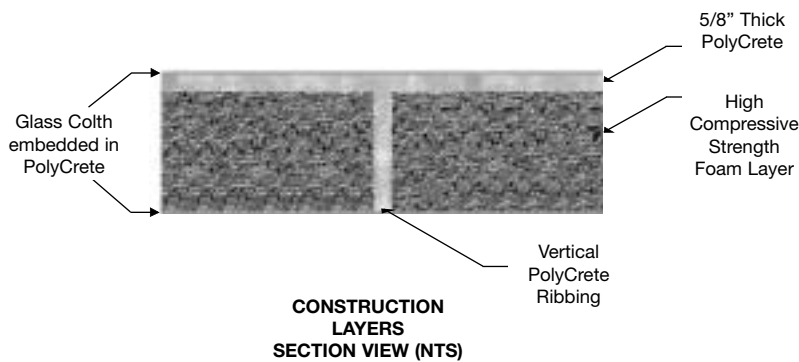

Equipment Pads

Transformer Pads

Model: EP4242-4

Carson Industries, LLC

Glendora, California

Toll-Free: 800.735.5566

Phone: 909.592.6272

Fax: 909.592.7971

Roscommon, Ireland

Phone: 35.39.03.25922

Fax: 35.39.03.25921

Shipping Configuration

Standard Test Method	Properties of Raw Material	ASTM Designation	Test Results
Compressive Strength of Polymer Concretes	Compressive Strength	C 579-96	11,000 psi
Flexural Strength and Modulus of Elasticity of Polymer Concretes	Flexural Strength* Modulus of Elasticity*	C580-93	1,800 psi 2,900,000 psi
Chemical Resistance of Polymer Concretes	Chemical Resistance	C 267-97	Pass ⁴
Determination of Impact Resistance by means of a Tup (falling weight)	Impact Resistance	D 2444-93	Pass ⁵

²Coefficient of Friction (ASTM C1028) >0.5

⁴Specimens exposed to ten reagents (alkalis, acids and petroleum distillates) experience <2% weight and dimensional change and retain >75% of average Compressive Strength. Listing of reagents and test reports available upon request.

⁵Capable of withstanding 70 ft lbs impact with a type "C" Tup.

Shipping Information

Dim.	Description	Value
A	Height	44"
B	Length	48"
C	Width	54"

Units: 10 pads per pallet

Weight: 1,455

